



AC Charging Station

Key Features

Unique Design

7" LCD Display for excellent experience

Powerful Charging Capability

1-Phase 7kW & 3-Phase 22kW available

Current Leakage Protections

RCCB Type-B

Smart Network Connectivity

Intelligent Ethernet, Cellular, WLAN Switching

RFID & Mobile App Identification

User Authentication via RFID or Mobile App

Benefits

Easy configuration to any charging network

OCA & OCPI official member

OCPP 1.6J, OCPP 2.0.1

OCPP Smart Charging

Smart Load Balancing

Applications



Residential



Commercial



Fleet



Parking




Specification

Specifications are subject to change without notice.

Model	IOCAW05C-7	IOCAW05C-22
Application	Residential / Commercial	
Voltage and Wiring	Single Phase 230V	Three Phase 400V
Frequency (Hz)	50/60Hz	
Current Output	Single Phase 32A Max	Three Phase 32A Max
Charging Connector	Type-2 Socket or Type-2 Tethered 5m	
RCD	RCCB Type-B	
Electrical Protection	Over current, Under voltage, Over voltage, Over temperature, Surge protection, Short circuit, Ground fault	
Buttons	1 x Physical Button	
Indications	Standby(Green), Charging(Flashing Green), Fault(Red), Warning(Flash Red)	
Network Connectivity	Ethernet, WLAN, Cellular	
RFID	ISO 14443 A/B	
Display	7" LCD	
Data Protocol	OCPP1.6J, OCPP2.0.1	
Operation Temp.	-30 °C ~ 50 °C / -86 °F ~ 122 °F	
Storage Temp.	-40 °C ~ 70 °C / -104 °F ~ 158 °F	
Working Humidity	5%~95% without condensation	
Mounting Type	Wall Mount (default) / Floor post (optional accessory)	
Ingress Protection	IP54	
Dimension (H x W x D, mm)	400mm x 270mm x 130mm	
Web Portal Management	Yes	
Weight	9.8Kg Socket Version 12.4Kg Tethered Version	11.2Kg Socket Version 13.8Kg Tethered Version
Mobile App	ios/Android	
Certification	CE, IEC 61851-1, IEC 62196-2	

Dimension Details

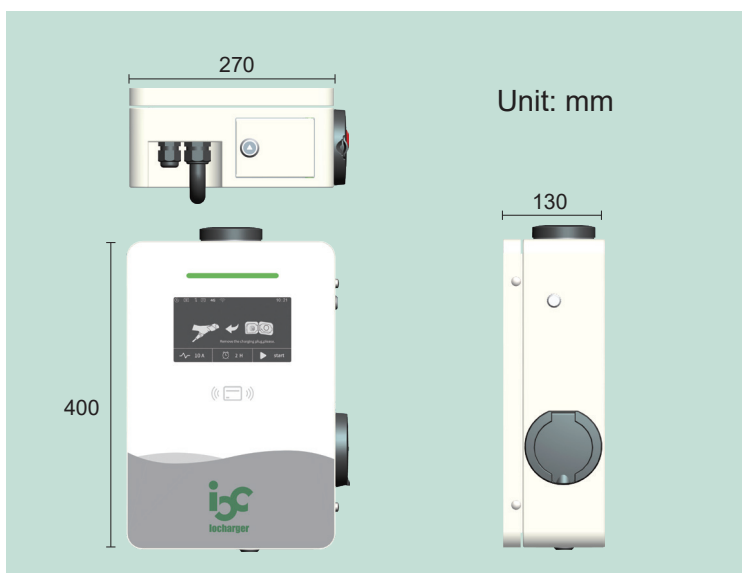

For more product information and sales inquiries :



XIAMEN GALAXY CAMPHOL TECHNOLOGY CO.,LTD

www.iocharger.com

+86-592-6022509

sales@iocharger.com

UNIT04, 14th floor, Building A01, Software Park 3,
Jimei, Xiamen, Fujian, P.R.C